BOXi2 compact and versatile

BAT

Front panel

The BOXi2 implements Intel's processor coupled with Intel's fast networking technology. The BOXi2 can be configured as a thin client, running applications off a server. It also has the processing power to run complex applications under Windows.

The BOXi2 is designed to offer a longer shelf life than many other brands. The same model of BOXi2 will generally be available for a minimum of 4 years (from release date), which allows large roll outs to install the same model over a period of time.

Technology

Atom DualCore 2GHz, up to Core2Duo 2.5GHz

Memory 2GB, or 4GB

200GB HD, or 40GB SSD

Operating System

Windows 7 Pro, POS 7, Linux

Connectivities

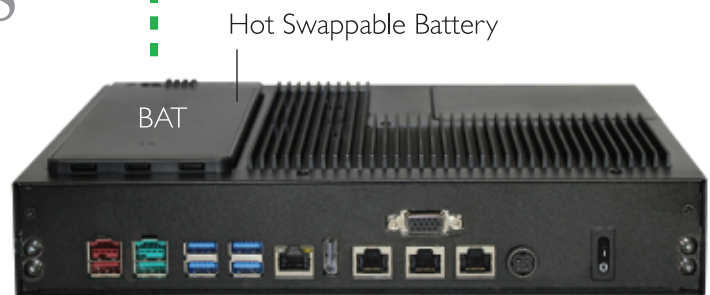Intel 10/100/1G BaseT

4 × Serial, RJ45

6 × USB 2.0

1 × poweredUSB +12V

1 × poweredUSB +24V

1 × VGA

Hot Swappable Battery

BAT

Back panel

9.5" (W) × 7.9" (D) × 2.7" (H)

External, 150W, 100-220V auto select

0° C to 40° C, Humidity: 20% to 80%

FCC, CE

All trademarks belong to their respective companies. Specifications subject to change without notice.

Pioneer INC